

## CONTROTELAI SUBFRAMES

### CONTROTELAIO STANDARD

Controtelaio in lamiera zincata a caldo profilata.

Sezione mm 70 x 38 spessore 2 mm.

Dotato di n° 4 zanche ottenute per roditura e di n° 4 fori di fissaggio Ø 12 mm per parte.

Dotato di n° 3 distanziali (estraibili) fissati ad incastro tramite n° 6 viti M6x70 mm.

Nella parte inferiore (lato interno) è presente una apertura di mm 30x30 per consentire il sormonto del dentello soglia. Il livello a cm 100 dal pavimento finito è contrassegnato da una linea orizzontale con sottostante freccia e il n° 100.

### STANDARD FRAME

*The subframe is made of profiled hot-dip galvanized sheet metal of section 70x38 mm 2 mm thick.*


*The two vertical profiles are equipped with nr. 4 nibbled clamps and nr. 4 fixing holes diameter 12 mm on each side.*

*The subframe is provided with nr. 3 (removable) interlocking spacers fixed with nr.6 M6x70 mm screws.*


*In the lower part (internal side) there is a 30x30 mm space to allow the threshold installation.*

*A label located in correspondence to sheet punching indicates the 100 cm level from the finished floor.*


**Controtelaio standard**  
*Standard subframe*

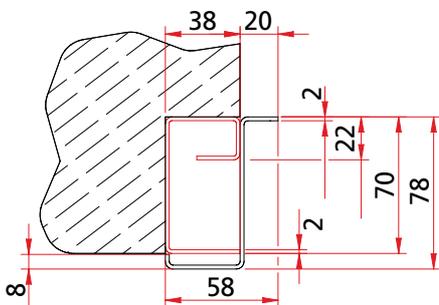


**Controtelaio genovese**  
*Genovese subframe*

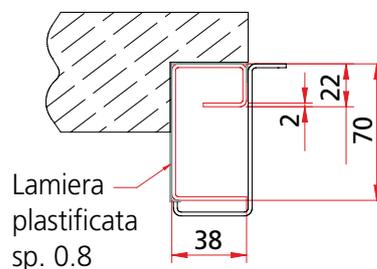


**Controtelaio francese**  
*Francese subframe*



**Controtelaio filo intonaco**  
*Subframe with plate for plaster covering*



**Controtelaio porta ZTL**  
*ZTL subframe*



**Controtelaio porta ZTL in luce**  
*ZTL subframe outside wall*

