







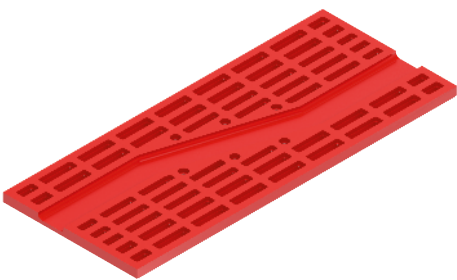

2.2.1.4 GL-IB

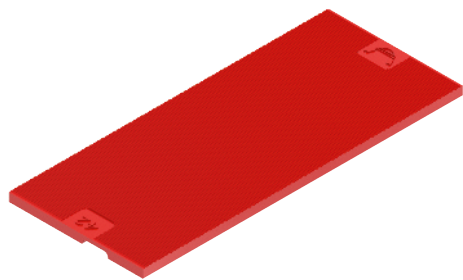

Product description

- For triple glazing
 - With ventilation channel for constant rebate area ventilation and vapour pressure compensation^[2]
 - Secured load transfer through special geometry of the ventilation channel
 - High load-bearing capacity thanks to reinforced profile leg system
 - Stable under continuous pressure
- Ageing-resistant
 - Temperature-resistant
 - Compatible with many edge composite sealing compounds for insulating glass
 - Length: 100 mm

				Nº
42	1	White	500 Piece(s)	737730
	2	Blue	500 Piece(s)	737731
	3	Red	500 Piece(s)	737732
	4	Yellow	500 Piece(s)	737733
	5	Green	500 Piece(s)	737734
	6	Black	500 Piece(s)	737735
44	1	White	500 Piece(s)	540121
	2	Blue	500 Piece(s)	540123
	3	Red	500 Piece(s)	540125
	4	Yellow	500 Piece(s)	540127
	5	Green	500 Piece(s)	540129
	6	Black	500 Piece(s)	540131
48	1	White	500 Piece(s)	540133
	2	Blue	500 Piece(s)	540135
	3	Red	500 Piece(s)	540137
	4	Yellow	500 Piece(s)	540139
	5	Green	500 Piece(s)	540141
	6	Black	500 Piece(s)	540143
50	1	White	500 Piece(s)	737704
	2	Blue	500 Piece(s)	737725
	3	Red	500 Piece(s)	737726
	4	Yellow	500 Piece(s)	737727
	5	Green	500 Piece(s)	737728
	6	Black	500 Piece(s)	737729

[2] From a height of 3 mm