


## Lever-operated espagnolette Plus

### Fixed and centred/variable handle height

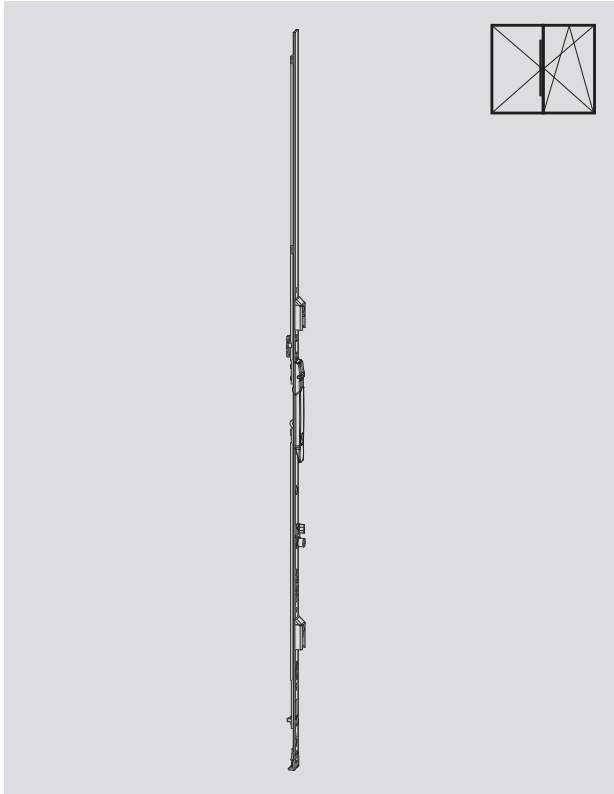


#### Lever-operated espagnolette Plus, fixed lever-height

SRH/mm	Length/mm	Lever position/mm	Material no.
431 – 500 <sup>2)</sup>	490	195	<b>623365</b>
501 – 600 <sup>3)</sup>			
431 – 600	490	233	<b>623366</b> <sup>1)</sup>
601 – 800	690	195	<b>623368</b> <sup>1) 5)</sup>
601 – 800	690	195	<b>623367</b> <sup>1)</sup>
601 – 800	690	335	<b>623369</b>
801 – 1000	890	490	<b>623371</b>
801 – 1000	890	195	<b>623370</b> <sup>1) 4)</sup>
1001 – 1200	1090	335	<b>623372</b>
1201 – 1400	1290	335	<b>623373</b>
1401 – 1600	1490	335	<b>623374</b>
1601 – 1800	1690	335	<b>623375</b>
1801 – 2000	1890	640	<b>623376</b>
2001 – 2200	2090	640	<b>623377</b>
2201 – 2400	2290	640	<b>623378</b>

#### Note:

Lifting mishandling device (stop for lever-operated espagnolette), preassembled as standard.

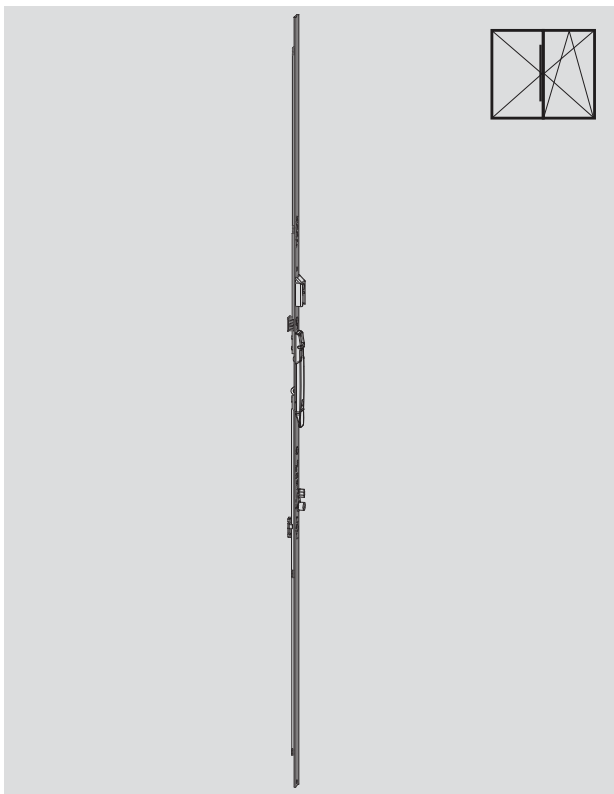

#### Lever-operated espagnolette Plus, centred/variable lever-height

SRH/mm	Length/mm	Lever position/mm	Material no.
370 – 620	400	225 – 350	<b>623379</b> <sup>4)</sup>
621 – 800	680	393 – 482	<b>623380</b>
621 – 900	680		<b>623381</b> <sup>1)</sup>
801 – 1200	980	482 – 682	<b>623382</b>
901 – 1200	980		<b>623383</b> <sup>1)</sup>
1201 – 1600	1380	448 – 658	<b>623384</b>
1601 – 2000	1780	680 – 890	<b>623385</b>
2001 – 2400	2180	880 – 1090	<b>623386</b>

#### Note:

Lifting mishandling device (stop for lever-operated espagnolette), preassembled as standard.

1) For T&T espagnolette, 8 mm backset

2) With special corner drive

3) With corner drive

4) Without lifting mishandling device (stop for lever-operated espagnolette)

5) No striker possible