



BING

MOVIMENTAZIONE BIDIREZIONALE REGOLABILE



Movimentazione bidirezionale | Two-way movement |
Mouvement bidirectionnel | Movimiento bidreccional



Realizzata in zama zincata; tassello di regolazione in nylon, entrata regolabile



Made of galvanized zamak; Nylon adjustment plug, adjustable entry



Réalisé en zamak zinguée; pièce de réglage en nylon, entrée réglable




Fabricado en zamak galvanizado; Taco de regulación en nylon, entrada ajustable




ART.	3626.1 3626.2			
Imballo Package Conditionnement Embalaje	10 PZ			
Finiture disponibili Available finishes Finitions disponibles Acabados disponibles	1	2	3	4

DESCRIZIONE DESCRIPTION	ART.	ENTRATA MIN. MIN BACKSET	ENTRATA MAX MAX BACKSET	NODI SECTION
"BING" Movimentazione bidirezionale "BING" Two-way movement	3626.1	15	27	A01 - A02 A03 - A04 A05 - A06 A07 - A08
	3626.2	23	35	



Art. 3626.1

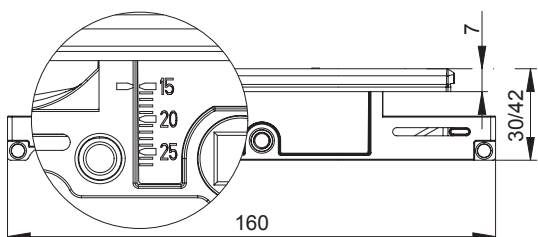

Art. 3626.2

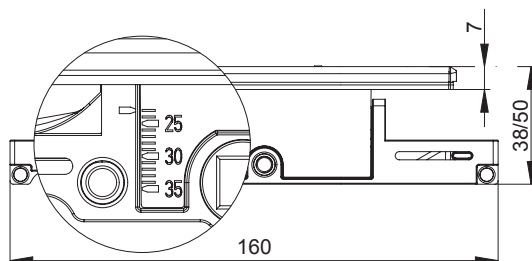

ENTRATA BACKSET	PERNO DI COLLEGAMENTO CONNECTION PIN
15-18 mm	6420E.11
16-20 mm	6420E.13
19-23 mm	6420E.16
22-25 mm	6420E.18
25-29 mm	6420E.22
28-32 mm	6420E.25
30-34 mm	6420E.27
34-38 mm	6420E.31



LAVORAZIONI | MACHINING

