




6.3.6 Lato cerniera Power Hinge

6.3.6.1 Standard

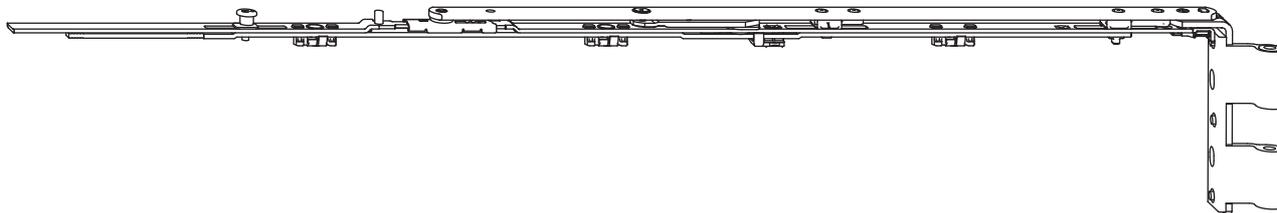

							N°		
12/18-9 12/20-9	600 – 800	350	20	12	Alluminio bianco	Sinistra	613978		
			20	12	Alluminio bianco	Destra	613979		
			29	12	Alluminio bianco	Sinistra	562007		
			29	12	Alluminio bianco	Destra	562008		
	801 – 1000	500	20	12	Alluminio bianco	Sinistra	613980		
			20	12	Alluminio bianco	Destra	613981		
29			12	Alluminio bianco	Sinistra	562009			
12/18-13 12/20-13	600 – 800	350	29	12	Alluminio bianco	Sinistra	562003		
			29	12	Alluminio bianco	Destra	562004		
			801 – 1000	500	29	12	Alluminio bianco	Sinistra	562005
					29	12	Alluminio bianco	Destra	562006


Per i supporti articolazione adatti vedere → *da pagina 562.*



INFORMAZIONI

Per campi di applicazione con LBB da 1001 a 1600 mm utilizzare anche la chiusura centrale.

6.3.6.2 TiltFirst (TF)

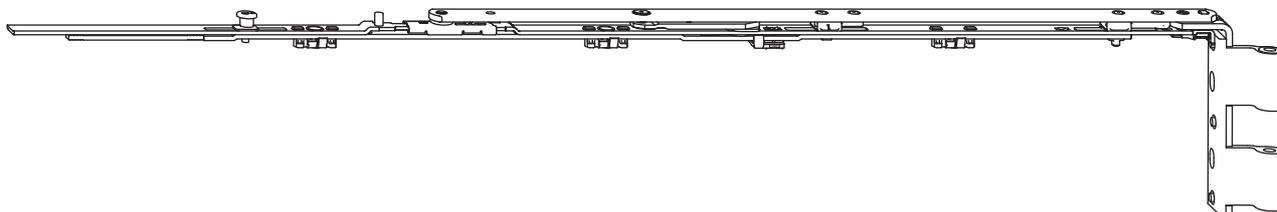

							N°
12/18-9 12/20-9	600 – 800	350	29	12	Alluminio bianco	Sinistra	602043
			29	12	Alluminio bianco	Destra	602044
	801 – 1000	500	29	12	Alluminio bianco	Sinistra	602045
			29	12	Alluminio bianco	Destra	602046